Specification/Data sheet

UltraVent[®] 61/101 E

Article number: 60.72.327

Description

• The condensation technology in UltraVent[®] absorbs and dissipates steam. There is no need for complicated and expensive installations to remove exhaust air. Installation is simple and it can be retrofitted at any time. There is no need for a connection to the outside.

Technical Info

- Rating: 120 V 1 NAC 50/60
- Connected load: 450 W
- Extraction volume: 1.000 m³/h:
- Operating noise level 1: 55 dBA
- Operating noise level 2: 60 dBA
- Width: 33 5/8" (854 mm)
- Height: 17 11/16" (450 mm)
- Depth: 48 1/4" (1,226 mm)
- Weight: 119 lbs. (54 kg)
- Approvals: UL 96, UL 202, UL 197

Features


- Integrated lighting
- Easy-clean grease filter (CNS)
- High extraction rate
- · Proximity door contact switch
- Extraction rate automatically increased when cabinet door is opened

Material

• CNS 1.4301 (CNS 304)


Hint

• The local norms and specifications for air conditioning systems must be observed. A raised base cabinet US III (36 5/8") should be used for installation on type 61 units.



RATIONAL Cooking Systems 895 American Lane Schaumburg IL 60173 USA Tel.: (847) 273-5000 Fax.:(847) 755-9583 Visit us on the internet: www.rational-online.com

We reserve the right to make technical improvements

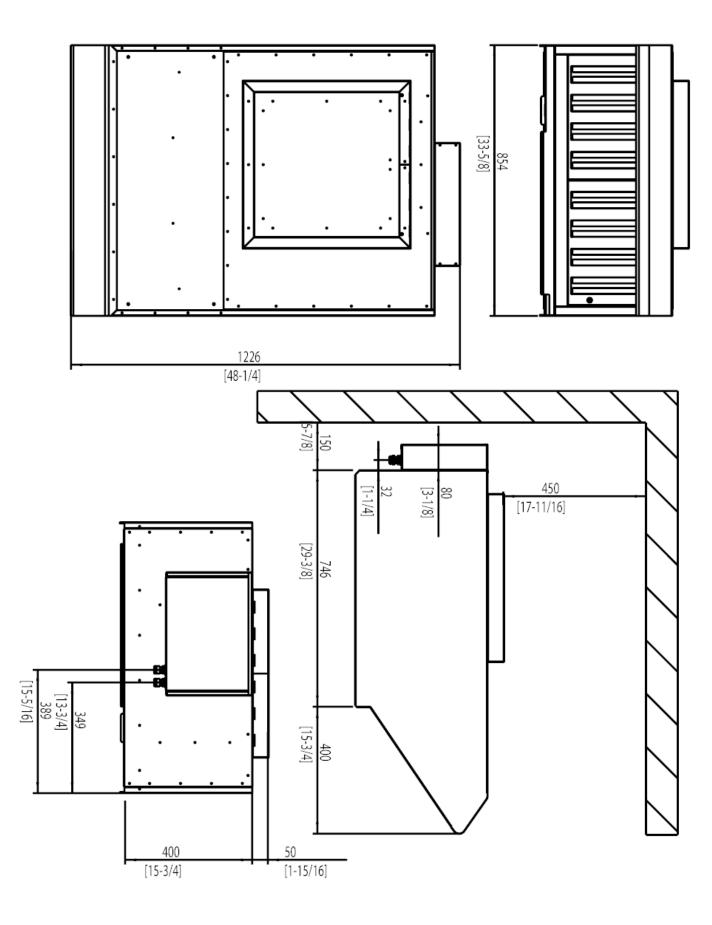

RATIONAL Cooking Systems

895 American Lane Schaumburg IL 60173 USA Tel.: (847) 273-5000 Fax.:(847) 755-9583 Visit us on the internet: www.rational-online.com

We reserve the right to make technical improvements